

C1
A102 Second Floor Plan - Base Bid
1/8" = 1'-0" 8,507 Square Ft.

| SYMBOL KEY | |
|------------|-------------------------|
| | Detail Number |
| | Page Number |
| | Column Designation |
| | Wall Type Designation |
| | Window Type Designation |
| | Door Number |


GENERAL NOTES:

- PROVIDE RECESSED FIRE EXTINGUISHER AND CABINET.
- PROVIDE BLOCKING FOR MILLWORK, ROOF SCUTTLE LADDER, MARKERBOARD, PROJECTION SCREEN, AND OTHER EQUIPMENT AS REQUIRED. COORDINATE EXACT LOCATION. ALL BLOCKING IN WALLS TO BE FIRE-RETARDANT.
- CORRIDOR WALLS (BASE BID) TO RECEIVE GYPSUM WALL BOARD ON CORRIDOR SIDE ONLY, AS NOTED. WALLS SURROUNDING ROOF LEADERS TO RECEIVE GYPSUM WALL BOARD ON EXPOSED FACE, AS NOTED.
- CONSTRUCT WALLS AROUND ELEVATOR TO ALIGN DRYWALL SURFACES.
- INTERIOR DIMENSIONS SHOWN ARE FROM FACE OF STUD, UNLESS OTHERWISE NOTED.
- INTERIOR PARTITIONS PERPENDICULAR TO EXTERIOR WALLS ARE TO ALIGN WITH COLUMNS AND WINDOW MULLIONS ON EXTERIOR WALLS AS SHOWN.

RECORD DRAWINGS
Note: For final interior wall layout, refer to Sheet A104.

| KEY | MARK | DESCRIPTION | UL # |
|-----|------|--|------|
| A | | Typ. Exterior Brick Veneer Wall: 5/8" GWB (Interior), 4" Metal Studs, Batt Insulation, 5/8" Gypsum Sheathing, Air Infiltration Barrier, Air Space, and 4" Brick Veneer | - |
| B | | Exterior CMU/Brick Veneer Wall: 8" CMU (Interior), Dampproofing, 2" Rigid Insulation, Air Space, and 4" Brick Veneer | - |
| C | | Exterior CMU/Metal Panel Wall: 8" CMU (Interior), Dampproofing, Metal Panel System. | - |
| D | | Exterior Metal Panel/Stud Wall: 5/8" GWB (Interior), 4" Metal Studs, Batt Insulation, 5/8" Gypsum Sheathing, Air Infiltration Barrier, Metal Panel System. | - |
| E | | Curved Exterior Metal Panel Wall: Metal Panel System (Both Sides) over 6x6 vertical and horizontal Tube Sections as Occurs, and 6" Metal Studs. | - |
| F | | Typical Interior Partition (9'-0" high): 5/8" GWB, 3 5/8" Metal Studs, 5/8" GWB. | - |
| G | | Interior Wall (Continuous to Deck): 5/8" GWB, 3 5/8" Metal Studs, Batt Insulation, 5/8" GWB. | - |
| H | | 1-hr. Partition (Continuous to Deck): 5/8" Type X GWB, 3 5/8" Metal Studs, Sound Attenuation Insulation, and 5/8" Type X GWB. | U465 |
| J | | 1-hr. Partition (Continuous to Deck): 5/8" Type X GWB, 3 5/8" Metal Studs, and 5/8" Type X GWB. | U465 |
| K | | Interior 1-hr. Rated CMU/GWB Wall: 8" CMU, 1" Rigid Insulation, 1 1/2" Z-Purring, 5/8" Type X GWB | U912 |
| L | | Interior 1-hr. Rated CMU/GWB Wall: 8" CMU, 7/8" Hat Channels, 5/8" Type X GWB. | U914 |
| M | | Typical Corridor Wall (9'-6" high): 5/8" GWB, 3 5/8" Metal Studs, 5/8" GWB. | - |

| REVISIONS | | |
|-----------|---------|------|
| No. | Remarks | Date |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |
| | | |

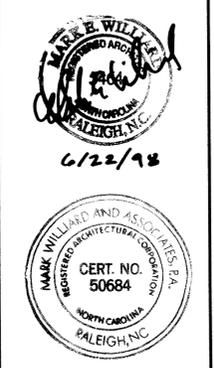

Mark Williard & Associates, P.A.
728 North Blount Street
Raleigh, North Carolina 27604
Tel.: 919 834-0620 Fax: 919 834-2149

City of Raleigh
Office Building for
Raleigh Business & Technology Center
900 South Wilmington Street
Raleigh, North Carolina 27601

Drawing Title:
Second Floor Plan
Base Bid
Sheet No.
A102
of
Date: 15 January 2001