


TYPICAL CASING PIPE PLUG

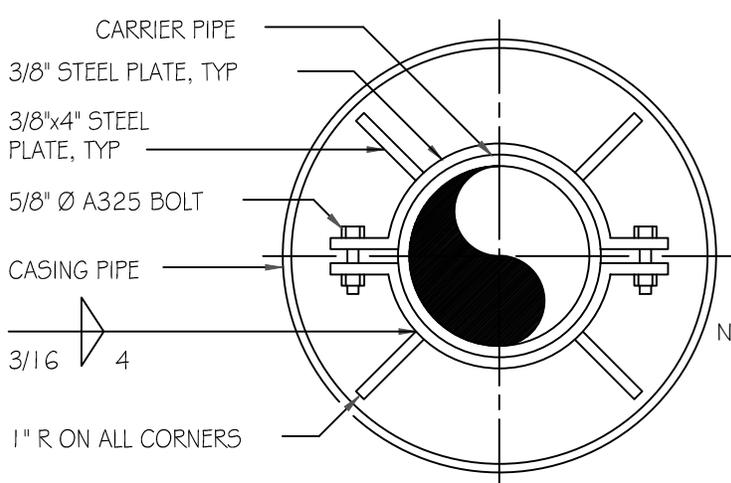

NOTE:
USE A MINIMUM OF 2 SPIDERS PER JOINT PLACED ONE FOURTH OF THE PIPE JOINT LENGTH IN FROM BOTH THE BELL AND SPIGOT.

PIPE ALIGNMENT GUIDE

CITY OF RALEIGH			
DEPARTMENT OF PUBLIC UTILITIES			
AERIAL PIPE CROSSING			
CASING PIPE DETAILS			
DWG. NO.	REVISIONS	DATE	REVISIONS
S-18	A.B.B.	4-16-04	
	D.H.L.	6-18-08	