


MAINTENANCE:
REPAIR/REPLACE BAFFLES WHEN THEY COLLAPSE, TEAR OR DECOMPOSE.
REMOVE SEDIMENT WHEN CELL IS 1/2 FULL.


PERSPECTIVE VIEW

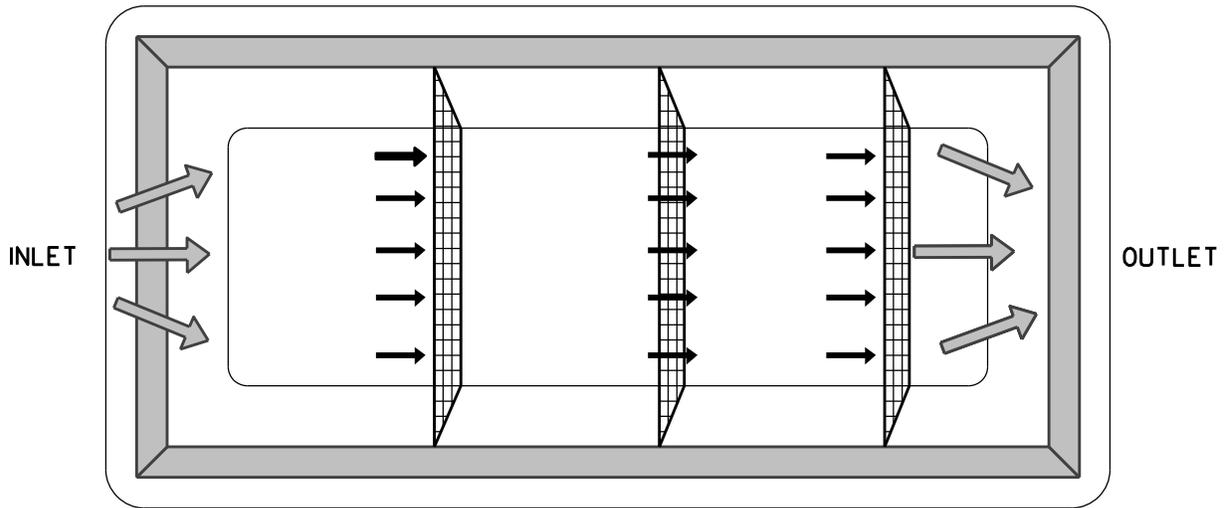

TOP VIEW

NOTE:

- 3 BAFFLES (MIN) BETWEEN INLET & OUTLET.
- SEE N.C. DENR EROSION and SEDIMENT CONTROL PLANNING and DESIGN MANUAL FOR CONDITIONS WHERE PRACTICE APPLIES; PLANNING CONSIDERATION & DESIGN CRITERIA.

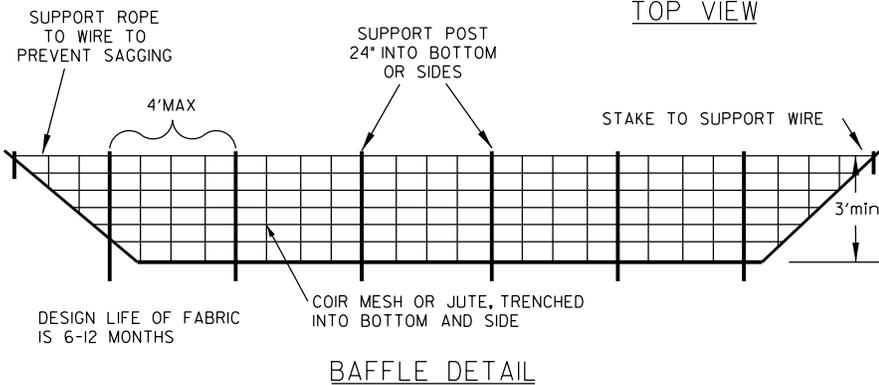

BAFFLE DETAIL

CITY OF RALEIGH PUBLIC WORKS DEPARTMENT		
REVISIONS	DATE: 3/7/07	DRAWN BY: JTT
WDP 1-9-2012		
WDP 10-9-2012		
TEMPORARY SEDIMENT TRAP		
STD. # 40.12		